

SOFTENER 30L CLACK WS1

DESCRIPTION

Compact water softener system with Clack WS1 CI control valve. This metered 30L softener with CLACK control valve includes structural brand mineral tank, brine tank, safety float valve and premium cation cross-linked softening resin (30L). Easy to operate and maintain. This softener from USA comes with a large salt brine tank container (85Kg).

- Tanks and covers made in European Union
- Pre-adjusted US made Clack valve CI
- Correctly selected and installed injector and DLFC


COMPONENTS INCLUDED:

Cabinet softener assembly, including:


- Pre-adjusted CI valve with correctly installed DLFC and injector
- Pressure tank
- Brine well with safety float valve
- Softener's body
- Resin

TECHNICAL DETAILS

- Operating flow rate: 1.5 - 6.2 m³/h
- Quantity of media: 30L
- Usage of salt per regeneration: 2.5 - 4.0kg
- Usage of water per regeneration (= discharge per regeneration): 0.25m³
- Pressure drop in service mode: 0.5bar
- Inlet pressure: 2-6bar

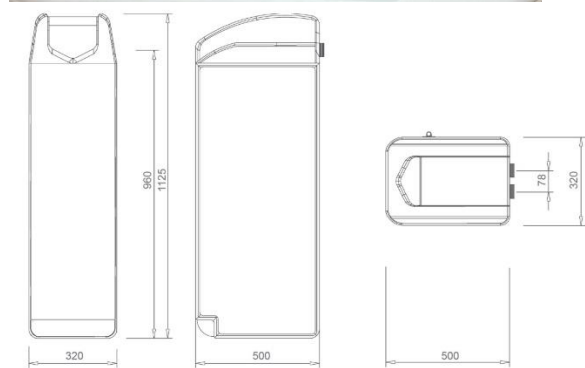

- Electrical requirements: 230V/50hz
- Power consumption during regeneration: 30W
- Inlet/outlet pipe connections: 1"
- Overall dimensions, (Width × Depth × Height): 32 x 50 x 113cm

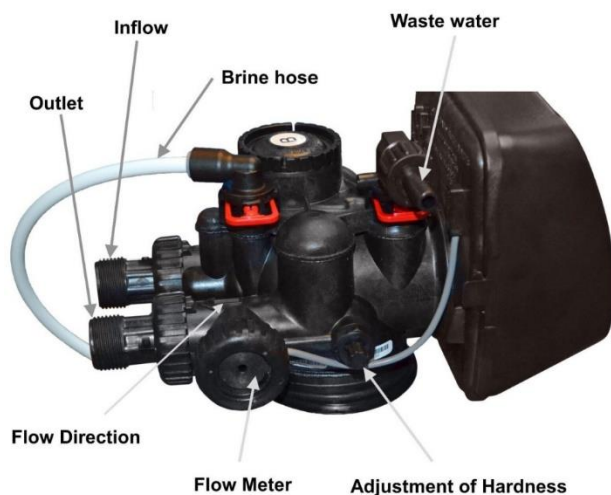

Valve to adjust the water hardness. When you turn it completely to the left the hardness will be 0°dH. If you turn it to the right completely the hardness will be between 5°dH - 8°dH.